


Multi-function IR Clock
SecuVox™ Motion Detection Night Vision HD
Clock Camera
KL216



I Product demonstration

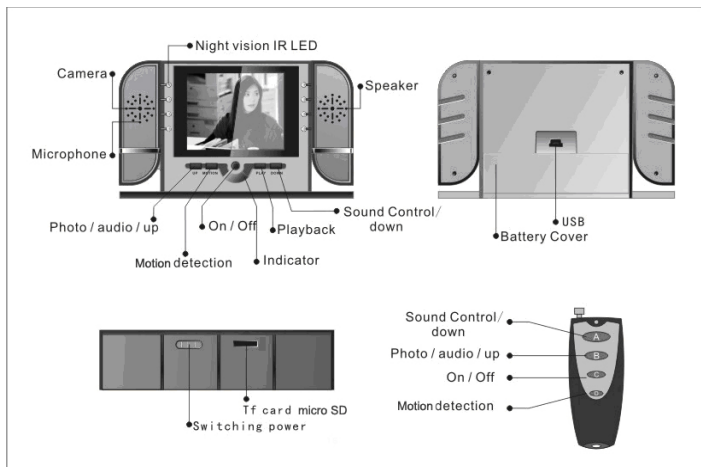

Features:

- Video player and recorder
- Motion Detection Video Recording
- Voice-activated Video recording
- Manual Video Recording
- Taking Photos
- Voice Recording
- Web camera

- 24-hr digital clock (display only military time)

II. Product Introduction

This Motion Detection HD Camcorder Player and Recorder with Desk Clock and 2.4 inches LCD Monitor and remote is specially designed for security surveillance at home, office and for frequent travelers. It comes with remote control and supports up to 32GB micro SD card memory. It is not just a regular military time digital clock; it is actually a motion-activated pin-hole HD camcorder, taking video onto a SD card with motion activated function and let you view /play/edit/delete on your recorded video or audio on both your clock's 2.4" LCD monitor and or your PC monitor. It is ideal for office, home, stores, and on-the-go eyewitness covert surveillance.

III. Instruction Guide

- 1) **Battery Charging:** Insert the battery into the battery compartment with correct “-“and”+” direction. The device comes with

two USB cables: one for file transferring to PC and one for charging. Please make sure you do charging with the USB Charging Cable (The USB cable with a “USB Charging Cable” TAG on it). For charging, turn the power switch at the bottom of clock to OFF position, connect the device to PC through the USB Charging Cable. During charging, the Yellow light flashes. After fully charged, the Yellow light stays on solid. For the first time use, please charge it for at least 6 hours or until the Yellow light stays on solid. (Note: during charging, the device is not ready for video/audio recording operation, but you can playback/delete files during charging with power switch at the bottom of clock at ON position).

- 2) **Turn on power:** Turn the power switch at the bottom of clock to the ON position, press the On/Off button once (or press the “C” On/Off button once on remote), the device displays time on screen and the Yellow light stays on solid. The device is now in Standby

status. To completely turn off the device, press and hold the On/Off button for 5 seconds (or press and hold the “C” On/Off button for 5 seconds on remote), the device will shutdown, Yellow and Blue light are off. (Note: turning off the device will not affect the time that was previously set up on device).

- 3) **Voice-activated Video recording:** In standby status, press the Sound Control/Down button once (or press the “A” Sound Control/Down button once on remote), the Blue light flashes 5 times and then both Blue and Yellow lights are off, the device is now in voice-activated standby status. When the external sound around the clock reaches 65 decibels or more, the device automatically records video for 3 minutes and saves video into SD card. The procedure (3-minute recording) will keep going continuously if the external sound is more than 65 decibels again and again, and stops if the external sound is less than 65 decibels.

To stop voice-activated video recording function, simply press the Sound Control/Down button once (or press the “A” Sound Control/Down button once on remote), the Yellow light stays on solid (under device standby status).

- 4) **Motion Detection Video Recording:** In addition to voice-activated function, you also can use Motion Detection function for video recording. Under standby status, press and hold the Motion Detection button for 5 seconds (or press and hold the “D” Motion Detection button for 5 seconds on remote), the blue light flashes 5 times and then both blue and yellow lights are off. The device is now under Motion Detection status. When there is motion in front of camera, the device automatically records video for 3 minutes and saves the video into SD card. This procedure will keep going continuously until there is no motion in front of camera. To stop the Motion Detection function, simply press the Motion Detection button once (or press

the “D” Motion Detection button once on remote), the yellow light stays on solid and the device is in standby status again.

- 5) **Manual Video Recording:** Under standby status, press the Motion Detection button once (or press the “D” Motion Detection button once on remote), the yellow light is off. The device is now doing video recording and the recording lasts for only 3 minutes and stops, and the yellow light stays on solid. If you want to do recording manually again, you have to press the Motion Detection button once again. (Note: every manual video recording lasts for only 3 minutes).

- 6) **Photo:** Under standby status, press the Photo/Audio/UP button once (or press “B” Photo/Audio/UP button once on remote), the screen and yellow light flashes once and takes photo and saves into SD card and go back to standby status with solid yellow light on. So every time you press the Photo/Audio/UP button once, it takes one

photo.

- 7) **Voice Recording:** Under standby status, press and hold the Photo/Audio/UP button for 5 seconds (or press the “B” Photo/Audio/UP button for 5 seconds on remote), blue light flashes 5 times and both blue and yellow lights are off. The device is now doing voice recording. To stop voice recording, simply press the Photo/Audio/UP button once (or press “B” Photo/Audio/UP button once on remote), the yellow light stays on solid and go back to standby status.

- 8) **Turn on infrared night vision:** Under standby status or during recording, press once on the On/Off button (or press once on the On/Off button on remote), the Blue light stays on solid and the infrared light is on. You can now do recording in dark area. To stop infrared night vision function, simply press once again on the On/Off button, the blue light turns off and yellow light stays on solid, back to standby status.

9) **Playback or delete mode:** Under standby status, press and hold the “Play” button for 8 seconds, the screen will display document folders (after you recorded video or audio or photo). Use “Up” or “Down” button to choose folder and then press On/Off button to confirm and enter that folder. After entering that folder, use “Up” or “Down” to choose file that you want to play, press On/Off button to play. Press On/Off button again to stop playing. If you want to delete that file, just press “Motion” button (Press “Motion” button again to cancel delete) and then press “On/Off” button to confirm delete. To exist play mode, simply press the “Play” button once again, the device goes back to time display on screen, and yellow light stays on solid under standby status. NOTE: you can operate this function during charging (with power switch at the bottom of clock at ON position).

10) **Time setting:** Under standby status, press

once on the “Play” button, the screen display Date Display Method / Date / Time. Press “Down” or “Up” button to choose and press On/Off to confirm. After choosing and confirming set up, press On/Off button once to go back to time display mode. Note: this clock only displays military time (24-hour).

11) Low power: If it detects that the battery is low, yellow and blue lights flash 2 times and the screen will shutdown, the shutdown will not affect the recorded files or the date and time that was previously set up. You just need to recharge the battery through the USB Charging Cable. Note: you can see the battery power status when you go into the Playback/Delete Mode to play or delete a recorded file. (Refer to Playback/Delete Mode section).

12) File Storage and transfer file to PC: Put the power switch at the bottom of clock to OFF position, using the USB Data Cable to connect the device to PC. After the folder

pops up, you can play / delete / copy files. If you cannot find the folder, you can click on “My computer” on your PC to find the folder. (Note: you do not have to install any software, when the power switch at the bottom of clock is at OFF position, you are using the device folder as regular U Disk).

- 13) Play video on PC:** Videos from this camera is with AVI format and can be played through Windows Media Player on most PC. To play videos, simply double click on the video file that you recorded, and the Windows Media Player will play the video automatically. If your Media Players on your PC does not play the video from this camera, you can install the driver to your PC with the following two options: 1: Install the CD Driver to your PC with the CD Driver included with the camera. Simply insert the CD into the CD Rom from your PC and follow the installation instruction to install it. 2: Or, You can also download VLC video player online at www.videolan.org/

(Download for Windows). After installing the VLC software, right click on video file and choose Play With VLC to play video. **NOTE:** if you do not know how to install driver to your PC, please consult your computer administrator for assistance.

14) Web Camera Software (Driver)

installation: This clock DVR works with most of existing web camera software in your computer. If your computer does not have existing web camera software, you can install the software from the CD. There are two software (STK02H2.3 and STK02N2.4) inside; you need to install both of them into your PC. If your PC has built-in web camera, you need to close it before installation.

NOTE: when downloading, you must save the software file to your desktop first, and then click on that file from desktop to open and click on RUN to do installation. After installation, restart your computer.

15) PC web camera function: This device can

be used as PC web camera, driver software need to be installed before use. Three steps to use web camera function. Step 1: put the power switch at the bottom of clock to ON position. Step 2: press On/Off button to turn on the device. Step 3: connect the device to your PC through the USB Data Cable (do not use USB Charging cable). Your PC will pop up a message asking you to install driver, following its instruction to install driver. After finishing driver installation, the screen on PC will display web camera equipment, you can now use it as web camera function. Note: After connecting the Clock DVR to PC, if you cannot see the Web Camera icon on PC screen, click on “My Computer” icon and you’ll see the web camera icon “Standard Camera”, click on it to start using web camera function. (If your PC has built-in web camera, you need to close it first in order to use this new web camera).

16) **CAUTION:**

- Do not spray any liquid on the clock

case or battery. It'll cause damage to the device and battery. Stop using the device when the clock is wet.

- Do not try to open the battery cover when it is in use or during charging or with the USB cable plugged into computer.
- Do not try to remove the battery with your bare hand, use a screw driver or tool kit to take out battery if necessary and be careful not to cause any damage to the battery. Try not to take out battery so often once it's loaded.
- Do not try to open the battery cover or touch the battery when your hand is wet. It'll cause damage to the device and battery.
- Do not put the clock close to fireplace or heated spots or under sunshine.
- Do not try to punch or disassemble the clock.
- Do not mix new battery with used

battery.

- Do not let children under age 12 to operate the device.

Parameter

Video Format	AVI
Video Coding	M-JPEG
Video Resolution	1280*720
Video frame rate	30fps
Play Software	Operating system comes with video player software or mainstream
Picture format	JPG
Image pixel	5M Pix
Image ratio	16:9
Support System	Windows me/2000/xp/2003/vista/7 Mac OS Linux

Battery capacity	2200MHA
Charging voltage	DC-5V
Interface type	MIN5P USB
Storage support	TF card / Micro SD card up to 64GB
Battery Type	High-capacity polymer lithium battery, 3000mAh 3.7V

NOTE: Please follow the State's law. Do not use this product illegally.

Warranty

Please contact seller for warranty time. No return will be accepted unless it is manufacturing defect related. 15% restocking fee will be applied if an item being returned is not related to manufacturing defect.

SecuVox™ is a trademark of Q.L.M., © all rights reserved,

Q.L.M.

www.ideatomorrow.com